


# **i** ProSecu

**Just Play**

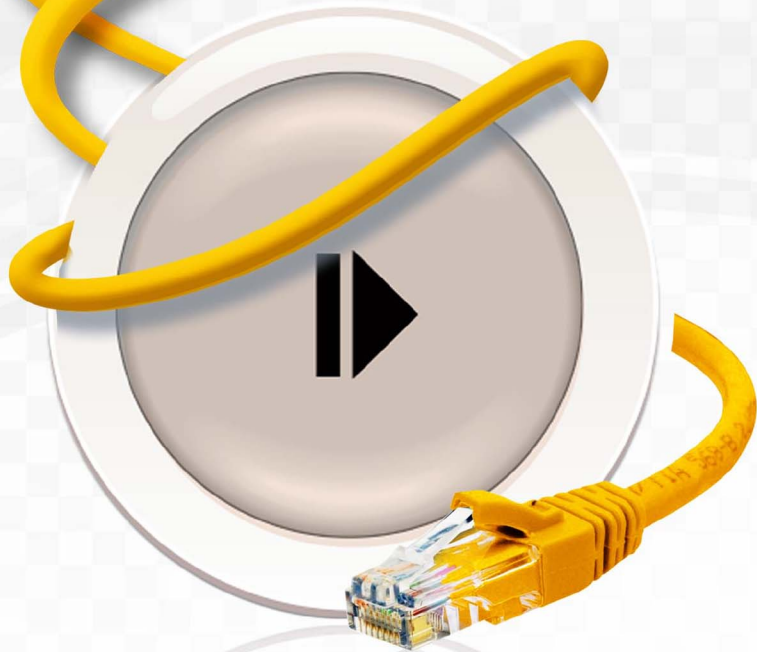

## iNR-16/09/04EC Network Video Recorders

### Features

01. Up to 16 channel NVR
02. Support 5 Megapixel IP Camera for each channel
03. Support H.264 / MPEG4 decoding
04. Support CMS (Central Management System) control
05. Support 4T HDDs x2
06. Easy HDD Installation
07. Fashionable Mechanical Design
08. Smart GUI Control
09. Audio Backup for all channels
10. PTZ and Smart E-PTZ Control
11. Multiple Video Output Interface
12. Live & Recording MASK Function
13. Multi Platform Browser Support
14. Support time-point backup function under Ethernet remote control mode.  
User can select any time period to process backup from remote side
15. Support time-search & event-search function under Ethernet remote control mode
16. Up to four online clients for independent remote control; individual live-time, play-back & time-search function available
17. Support PPPoE/ Static/ DHCP IP & DDNS
18. Powerful mobile surveillance function, support i-Phone & Android
19. Max 16 channels playback simultaneously
20. Total bitrate up to 64 Mbps



### Specification

		iNR-16EC	iNR-09EC	iNR-04EC
System	OS	Embedded Linux		
	Connector	Embedded Linux	RJ-45, 10/100/1000 Mbps x1	
		Video Output	VGA x1 / HDMI x1	
		USB	Front : USB 2.0 x2	
	Power	DC-12V, 4.16A		
Video and Audio	Video input	16 channels	9 channels	4 channels
	Audio input	16 channels	9 channels	4 channels
NVR Functions	Total Bitrate	64 Mbps	45 Mbs	24 Mbs
	Camera Name	Max. 20 characters		
	Screen Split Control	1, 4, 9, 16	1, 4, 9	1, 4
	Image Control	Contrast / Brightness / Saturation / Hue		
	Recording mode	Manual / Schedule / Alarm		
	Pre Recording	5~30 sec		
Searching and Playback	Search Method	Date / Time / Event		
	Date/ Time / Event Search	Selectable on the calendar		
	Log Search	Through the log data to find the video event / time		
Remote Client Software	Monitoring Environment	Hunt CMS, Iprosecu M.V2 for I phone / I pad , Iprosecu A.M.V2 for Android phone / Android pad, Web site		
	IP cam Live View	16 Channels	9 Channels	4 Channels
	Remote Search	Web site remote time / event search		
System Monitoring and Recovery	Monitoring	Watchdog		
Peripheral Devices	Audio in	3.5 Ø Earphone stereo jack		
	Audio out	3.5 Ø Earphone stereo jack		
Storage & Backup Device	INTERNAL HDD SUPPORT	SATA HDD x 2		
	EXTERNAL BACKUP DEVICE	USB x2		
Networking	Type	Static/ DHCP/ PPPoE/DDNS		
Environment	Operating Temp.	0 - 45 °C / 32~113 °F		
	Humidity	0~80% RH (non-condensing)		
Language	Type	English / Traditional Chinese / Simple Chinese / Russian / Italian / Japanese / Czech / France / Germany / Spanish / Portuguese		
Physical	Color	Black		
	Dimensions (W x H x D)	115 x 175 x 144.5 mm		
	Weight	1.6 KG		

◆ SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE